

## Video Specification


Resolution	1080p HD   720p HD
Frames per second	30 FPS
Encryption	AES256
Field of view	130 degrees
Date & time stamp	Embedded 24 hour, UTC/GMT
Camera identification	Unique serial number stamp
Pre-record	Configurable
Audio format	MP2
Audio mute function	Configurable
Security	WPA2, SFTP, STP, AES256
Low light performance	Image visible at 0.2 Lux
Video tagging	Configurable
Stealth mode	Configurable
System boot time	<1 second in standby mode
Format / compression	H.264 codec, MP2/AAC or equivalent
File segmentation	Video files 30 minutes/configurable

## Connectivity

USB connectivity	USB 3.0 connection
Charging / WiFi dock	+5Vdc, 1.4a charging
Charging / WiFi dock size	84mm x 75mm x 31mm
Upload Control Module (UCM)	Options available

## Camera

Storage capacity	Internal anti-tamper memory
Recording capacity	13.5 hours
Standby life	~150 hours
Full charge	<2.5 hours
Min working temperature	- 20°C
Max working temperature	+ 50°C
Shipping / storage temperature	-20°C to + 50°C <85% relative humidity
Water test	IP66
Drop test	3 metres
Battery type	Lithium-ion (non-removable)
Reset switch	Yes
Dimensions	99mm x 58mm x 23mm
Weight	155gm
FCC class B	Yes
CE 2004/108	Yes
RoHS	Yes
WEEE	Yes
Environment testing	IP66
Multi-charge dock	Yes

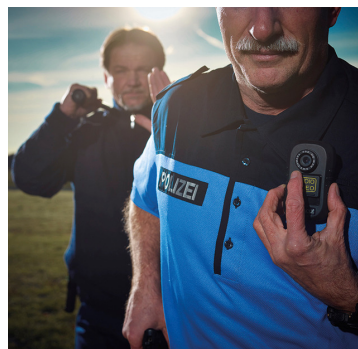

For further information contact [sales@pinnacleresponse.com](mailto:sales@pinnacleresponse.com) or call a member of our sales team on 028 95 320 222.